



KIM LIGHTING

P.O. Box 60080 • 16555 East Gale Ave.
City of Industry, California 91716-0080
626/968-5666 • Fax 626/330-3861










WD18-LED



WD14-LED

WALL DIRECTOR-LED™ - WD18-LED / WD14-LED Installation Instructions

-  **WARNING:** Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.
-  **WARNING: RiISK OF FIRE OR ELECTRICAL SHOCK.** Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings. Luminaires wiring, power supply, or other electrical parts may be damaged when drilling for installation of retrofit assembly hardware. Inspect all wiring and components for damage.
-  **WARNING:** To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
-  **CAUTION:** Installation of this retrofit assembly requires a person familiar with the construction and operation of LED luminaire electrical systems and the hazards involved/Confier l'installation de ce necessaire de modernisation a une personne connaissant la construction et le fonctionemnet des installations d'eclairage fluorescent et consciente des risques qu'elles comportent.
-  **CAUTION:** Do not alter, relocate, or remove wiring, lampholders, ballasts, or any other electrical components/Ne pas modifier, deplacer ni enlever de cable, de douille de lampe, de ballast ou autre composant electrique.
-  **CAUTION:** Unless otherwise specified, do not make or alter any openings in the compartment of wiring or electrical components during installation of this retrofit assembly. plug all unused openings in the compartment of wiring or electrical components.
-  **CAUTION:** Only the holes indicated in the photographs and/or drawings may be made or altered as a result of kit installation. Do not leave any other open holes in an enclosure of wiring or electrical components.

MAINTENANCE: A regularly scheduled maintenance program should be established to retain optimum light output and reduce heat retention. Dusting with a soft, clean, dry cloth is normally sufficient for the reflector. Any accumulation of dust or dirt should be removed regularly from both sides of the lens during relamping (using ammonia water). Do Not use alkaline or acid cleaners on reflector surfaces.


NOTE: All wiring must be done by a qualified electrician. **KEEP THIS SHEET FOR FUTURE REFERENCE.**

- Contents of Kit:**
- (1) Emitter Deck
 - (1) Driver Assembly
 - (1) Front Drilling Template
 - (1) Rear Drilling Template


- Tools Required:**
- | | | | |
|-----------------------|--------------|----------------|-------------|
| 5/16" Socket | Ratchet | Hammer | Drill Motor |
| .166" (#19) Drill Bit | Center Punch | Locking Pliers | |

1. Make certain electricity is OFF before starting installation. Open lens frame and remove reflector assy. Unplug all disconnect plugs inside fixture.


WALL DIRECTOR-LED™ - WD18-LED / WD14-LED Installation Instructions

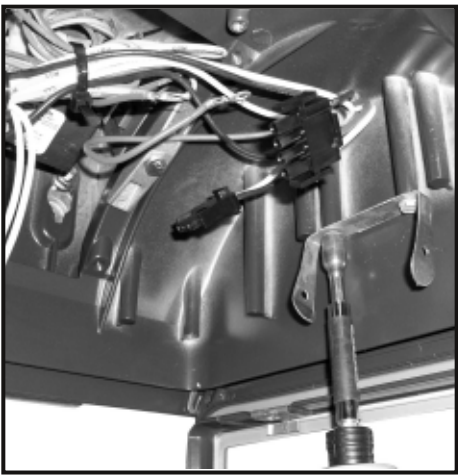


2. Remove reflector hinge bracket and replace screws half depth.

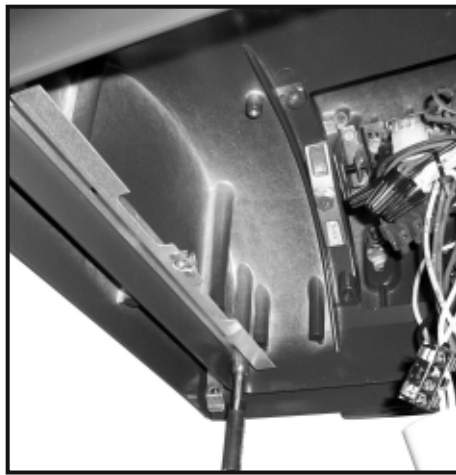

3. Remove reflector catch bracket and discard.

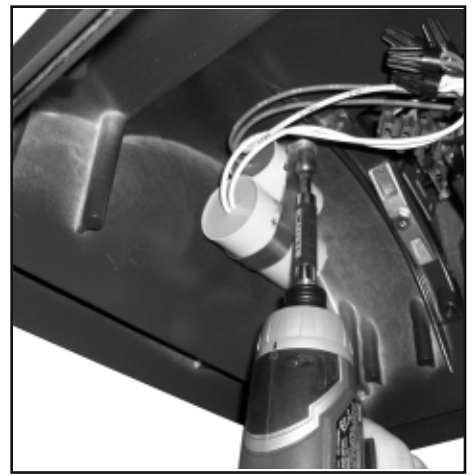

4. Remove capacitor strap and discard, replace screw into boss half depth.

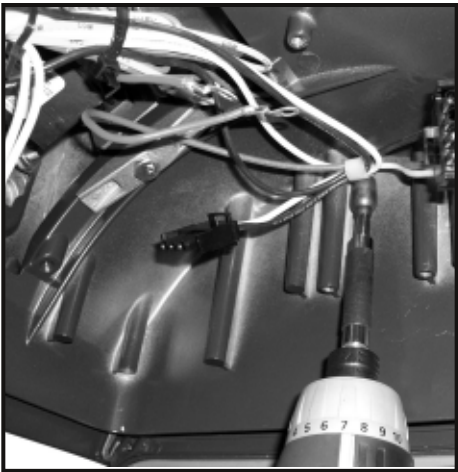

5. Remove screw holding wiring harness in place and discard.




6. Remove complete ballast assy by removing (2) screws securing ballast feet and discard.



7. Remove lens frame by flexing hinge outward with flat blade screw driver while pulling lens frame down.



8. Secure rear drilling template to inside of housing with locking pliers.

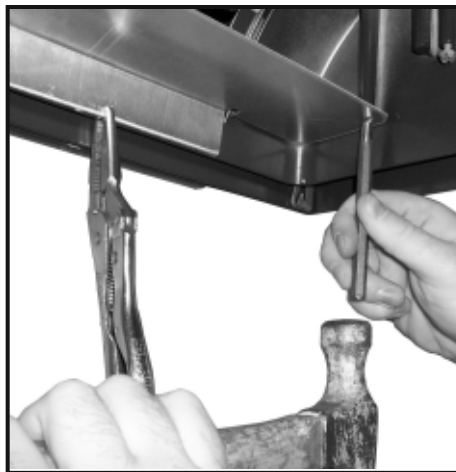

9. Center punch bosses inside fixture housing using template hole locations.




10. With a .166 (#19) drill bit, drill holes 3/8 deep in bosses required. Keep template in place to stop drill from wandering off


WALL DIRECTOR-LED™ - WD18-LED / WD14-LED Installation Instructions




11. Secure front drilling template to inside of housing with locking pliers.

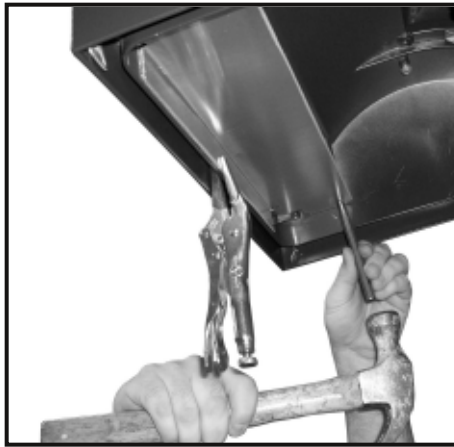

12. Center punch bosses inside fixture housing using template hole locations.

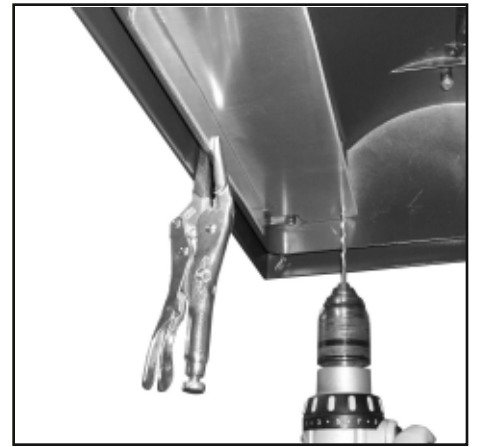

13. With a .166 (#19) drill bit, drill holes 3/8 deep in bosses required. Keep template in place to stop drill from wandering off center.

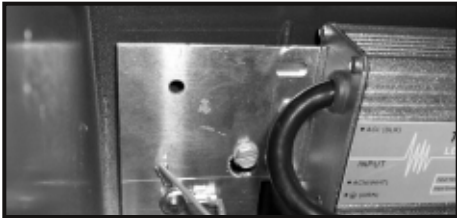

WD14

14. Slide Driver Assy under screws and lock in place then tighten screws (3 plcs).



WD18

14. Slide Driver Assy under screws and lock in place then tighten screws (2 plcs).




15. Attach ground lead and to boss in rear housing with screw and lockwasher provided.



16. Connect disconnect plugs between field wires and driver assembly. Connect disconnect plug between Emitter Deck and driver assembly.



17. Attach the sensor plugs to the thermal controller at the T1 & T2 locations. Do not plug anything into Dim location.

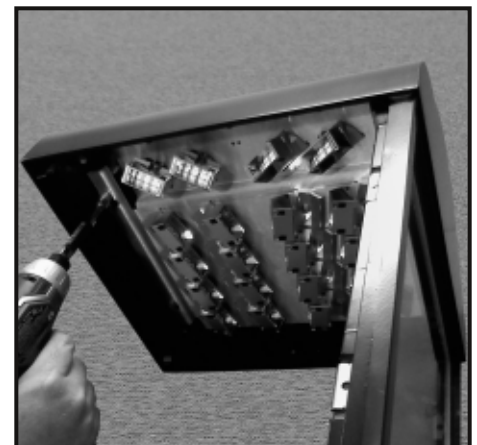

18. Thread screws into drilled holes half depth and lock emitter deck into place and tighten screws.

WALL DIRECTOR-LED™ - WD18-LED / WD14-LED Installation Instructions

KIM LIGHTING LIMITED WARRANTY

HID-TO-LED UPGRADE KIT WARRANTY

When properly installed and under normal conditions of use, Kim Lighting warrants LED Upgrade Kit products ("Product(s)") sold by Kim Lighting to be free from defects for (i) a period of six (6) years for LED Light Engines (MicroEmitters), (ii) a period of five (5) years for LED power components (LED Driver, LifeShield Device, Surge Protector), and (iii) for a period of one (1) year for the re-used metal housing components of the existing luminaire from the date of sale of the LED Upgrade Kit to the buyer as specified in Kim Lighting shipment documents for each Product(s). Conditions and limitations of the re-used metal housing component warranty are as follows: 1) existing luminaire must have been purchased within 15 years prior to the date of sale of the Upgrade Kit, 2) poles, arms, accessories, and options are excluded, 3) products installed in harsh or hazardous environments are excluded, 4) warranty covers defects in material and workmanship in excess of the normal wear and tear to which the luminaire can normally be expected to experience at the judgment of Kim Lighting from the baseline condition of the luminaire at the time of installation and registration of the LED Upgrade Kit, 5) owner must within 30 days of shipment of the LED Upgrade Kit by Kim Lighting register the product by emailing at least five (5) photo images of at least three (3) upgraded housings to upgrade@kimlighting.com referencing the job name and location, LED Upgrade Kit purchase order number, and approximate purchase date of the existing housing(s). Failure to provide complete registration information within the required 30 days will dissolve the one year housing warranty. 6) Kim Lighting reserves the right to deny the one year metal housing component warranty extension upon review of the submitted product images if the existing condition of the product indicates substantially excessive wear and tear beyond normal expectations given the product age. Occupancy sensors, LED drivers, dimmers and relay wiring components are covered by the manufacturer's warranty. The buyer agrees to make all claims regarding defects or deficiencies in the Product(s) according to the terms of Kim Lighting's official warranty. Warranty claims must be made in writing according to Kim Lighting procedures existing at the time of the claim. Valid warranty claims must be made within the warranty period specified herein above, and submitted within thirty (30) days of discovery of the damage or defect. No FIELD labor, repair, DISMANTLE, or installation charges are included with this warranty. Kim Lighting may repair or replace any Product(s) covered by this warranty at its sole discretion and in accordance with its procedure. Any unauthorized return, repair, replacement or modification of the Product(s) shall void this warranty. This warranty applies only to the use of the Product(s) as intended by Kim Lighting and does not cover any misapplication or misuse of said Product(s), or installation in hazardous or corrosive environments. In no event shall Kim Lighting's total liability for any reason arising hereunder exceed the purchase price paid to Kim Lighting for the product purchased by the buyer hereunder. Contact Kim Lighting for complete warranty language, exceptions, and limitations.



How may we serve you better?
Please let us know. Visit our website at:
www.kimlighting.com
Your concerns are important to us.