



LED Compact Floodlight



Supplement:
45W LED Compact Floodlight

45 Watt

LED Compact Floodlight

The CFL1 is designed for broad illumination with the fixture relatively close to the lighted surface maintaining excellent uniformity throughout its beam pattern. Recommended distance from the lighted surface is 3' to 15' depending on lamp and wattage.*

LED: A total of 9 LED emitters configured in a rectangular array comprised together as a module. Three (3) modules for 45W version. Available in "Halogen White" (approx. 3500K). Emitters are directly attached to the electronic driver.



LED Driver: Constant current electronic driver. Rated for 45W. Available in 120V or 277V input. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.

Die-Cast Housing: The LED Compact Floodlight housing and door frame are precision die-castings with integral cooling ribs that dissipate heat allowing the electrical components to operate well below their allowable limits.



Ordering Information

1 Fixture	2 Electrical Module	3 Finish
CFL1	45LED120 45LED277	BL Black DB Dark Bronze LG Light Gray SG Stealth Gray® PS Platinum Silver WH White


EXAMPLE:	Fixture	Electrical Module	Finish
	CFL1	/ 45LED120	/ BL
	1	2	3

The CFL1 Compact Floodlight is also available with the following sources:

- 50W to 70W Pulse Start Metal Halide
- 50W to 70W High Pressure Sodium
- 60W Incandescent
- 150W Halogen
- 13W to 42W Compact Fluorescent

Refer to Architectural Floodlights catalog or www.kimlighting.com for additional CFL1 details, fixture options, and mounting options.

* Photometrics are pending due to new IESNA testing parameters.

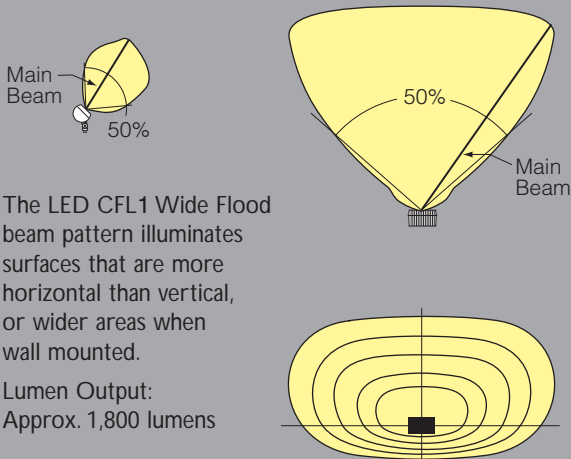

KimNOW! 5-Day Shipping • Quality On Demand



KimNOW! Available Configurations:

KN-CFL1/45L3K/DB *

Accessories:

**KN-BD-CFL/DB, KN-FH-CFL/DB,
KN-FS-CFL/DB, KN-JW/DB**

*120 volt only