



Type:
Job:
Catalog number:

/	/	/	/	
Mtg.	Fixture	Electrical Module	Finish	Options
See page 2				See pages 3-5


Select pole from Kim Arms and Poles Selection Guide. If pole is provided by others indicate O.D. for arm fitting.

Approvals:

Date:
Page: 1 of 6

Specifications

17" Diameter
42 to 150 Watt

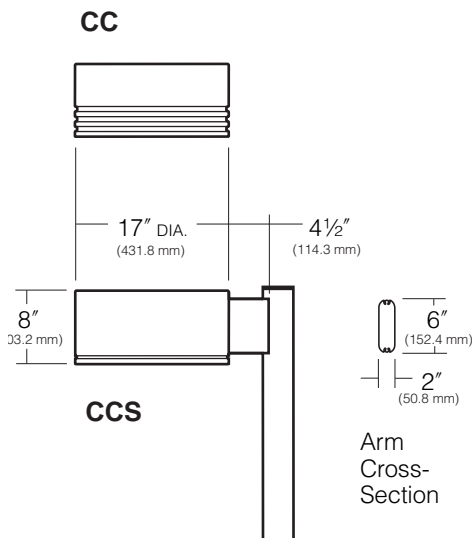

Housing: Spun aluminum. (Rollformed linear reveals; **CC:** Three equally spaced reveals, 1/2" wide, separated by 1/2" ribs, 1/4" deep. **CCS:** One 1/4" groove, 1/4" deep.) Sidewalls have a maximum 1° of taper, and are free of welds or fasteners. A rollformed aluminum flange is hemmed into the bottom providing support for the reflector module. An internal aluminum casting provides for mounting of the electrical module plus reinforcing for side-arm mounting of the fixture.

Lens Frame Assembly: One-piece cast aluminum lens frame is attached to the housing by a zinc plated cold rolled steel hinge with a stainless steel pin. Closure is by one self-retained stainless steel screw. A stainless steel self-locking stop arm is provided to hold the lens frame in the open position while servicing. A 3/16" thick clear flat tempered glass lens is fully gasketed by a one-piece extruded and vulcanized silicone gasket. Lens is retained in the frame by removable zinc plated steel clips.

Standard Arm Mounting: Arm is one-piece extruded aluminum with internal bolt guides and fully radiussed top and bottom. Luminaire-to-pole attachment is by internal draw bolts, and includes a pole reinforcing plate with wire strain relief. Arm is circular cut to mate with specified round pole.

Reflector Module: Specular Alzak® optical segments are rigidly mounted in a die-cast aluminum enclosure that attaches to the housing as a one-piece module. Reflectors are field rotatable in 90° increments. Sockets are factory prewired with a quick-disconnect plug for the ballast module. Wire penetrations to the socket are sealed by a silicone gasket to create a totally sealed optical chamber. The optical segments are positioned so that reflected light does not pass through the lamp arc tube. All reflectors are equipped with a medium base socket rated 4KV.

Electrical Module: All electrical components are UL and CSA recognized, mounted on a single plate and factory prewired with quick-disconnect plugs. Module attaches inside housing using keyhole slots. All ballasts are high power factor with starting temperatures of -40°F. for HPS and -20°F. for PMH lamp modes.

Finish/Color: Finish is Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 5000 hour salt spray test endurance rating. Standard colors are Black, Dark Bronze, Light Gray, Stealth Gray™, Platinum Silver, or White. Custom colors are available.

CAUTION: Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Listings and Ratings

UL cUL 1598*	CE	IP66 Rated	25C Ambient
Full Cut Off ² (Flat Glass Lens Only)			

*Suitable for wet locations

²Dark Sky Legislation Compliant


KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.



Type:

Job:

Page: 3 of 6




Standard Features

Electrical Module

HPS = High Pressure Sodium

PMH = Pulse Start Metal Halide

PL = Compact Fluorescent



Lamp Watts Lamp Type Line Volts
150 HPS 277

NOTE: for lamp/ballast information outside of the U.S.A. and Canada, please consult your local Kim representative.

WARNING: Fixtures must be installed and grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Finish

Super TGIC powder coat paint over a titanated zirconium conversion coating.

Cat. Nos. for Electrical Modules available:

High Pressure Sodium

<input type="checkbox"/> 70HPS120	<input type="checkbox"/> 100HPS120	<input type="checkbox"/> 150HPS120
<input type="checkbox"/> 70HPS208	<input type="checkbox"/> 100HPS208	<input type="checkbox"/> 150HPS208
<input type="checkbox"/> 70HPS240	<input type="checkbox"/> 100HPS240	<input type="checkbox"/> 150HPS240
<input type="checkbox"/> 70HPS277	<input type="checkbox"/> 100HPS277	<input type="checkbox"/> 150HPS277
<input type="checkbox"/> 70HPS347	<input type="checkbox"/> 100HPS347	<input type="checkbox"/> 150HPS347
<input type="checkbox"/> 70HPS480^{2,3}	<input type="checkbox"/> 100HPS480^{2,3}	<input type="checkbox"/> 150HPS480^{2,3}

Lamp	ED-17	ED-17	ED-17
Socket	Medium Base	Medium Base	Medium Base
ANSI Ballast	S-62	S-54	S-55

Pulse Start Metal Halide

<input type="checkbox"/> 70PMH120³	<input type="checkbox"/> 100PMH120³	<input type="checkbox"/> 150PMH120³
<input type="checkbox"/> 70PMH208³	<input type="checkbox"/> 100PMH208³	<input type="checkbox"/> 150PMH208³
<input type="checkbox"/> 70PMH240³	<input type="checkbox"/> 100PMH240³	<input type="checkbox"/> 150PMH240³
<input type="checkbox"/> 70PMH277³	<input type="checkbox"/> 100PMH277³	<input type="checkbox"/> 150PMH277³
<input type="checkbox"/> 70PMH347³	<input type="checkbox"/> 100PMH347³	<input type="checkbox"/> 150PMH347³
<input type="checkbox"/> 70PMH480^{2,3}	<input type="checkbox"/> 100PMH480^{2,3}	<input type="checkbox"/> 150PMH480^{2,3}

Lamp	ED-17, Clear	ED-17, Clear	ED-17, Clear
Socket	Medium Base	Medium Base	Medium Base
ANSI Ballast	M-98	M-90	M-102

Compact Fluorescent

<input type="checkbox"/> 42PL120¹	<input type="checkbox"/> 57PL120¹	<input type="checkbox"/> 60PL120¹
<input type="checkbox"/> 42PL208¹	<input type="checkbox"/> 57PL208¹	<input type="checkbox"/> 60PL208¹
<input type="checkbox"/> 42PL240¹	<input type="checkbox"/> 57PL240¹	<input type="checkbox"/> 60PL240¹
<input type="checkbox"/> 42PL277¹	<input type="checkbox"/> 57PL277¹	<input type="checkbox"/> 60PL277¹

Lamp	Coated	Coated	Coated
Socket	GX24q-4 Base	GX24q-5 Base	2GB-1 Base
ANSI Ballast	---	---	---

¹ Multiple CFL lamp configurations (ie, two 42W lamps) are possible with certain optical systems. Consult factory for details.

² 480 volt with medium base lamp sockets may require approval by the local building code authority.

³ **CAUTION:** All manufacturers of metal halide lamps recommend turning them off for 15 minutes once per week when under continuous operation. This will reduce the risk of arc tube rupture at end of life. Also, color temperature may differ between manufacturers of metal halide lamps. See lamp manufacturers' specification sheets.

Lamps by others.


Color: Black Dark Bronze Light Gray Stealth Gray™ Platinum Silver White Custom Color⁴
 Cat. No.: **BL** **DB** **LG** **SG** **PS** **WH** **CC**

⁴ Custom colors subject to additional charges, minimum quantities and extended lead times. Consult representative. Custom color description: _____

Type:

Job:

Page: 4 of 6




Optional Features

Wall Mounting

Cat. No. **1W**
 No Option

Select from Mounting on page 2.

Wall Mount: A cast mounting plate of 356 alloy, low-copper (<0.6% Cu) aluminum, is mounted to the wall with bolts (by others). Fixture and arm are mounted to a cast 356 alloy aluminum cover plate before attaching to the wall mounting plate. The fixture-arm-cover plate assembly is hooked to the wall mounting plate, and secured with stainless steel screws provided. After mounting to the wall, field splices are made at the opening in the cover plate, then covered by a cast 356 alloy aluminum plate that blends with the cover plate design. Complete fixture-arm-cover plate assembly can therefore be mounted before field splices are made. Cover plate is finished to match arm and fixture powder coat color.

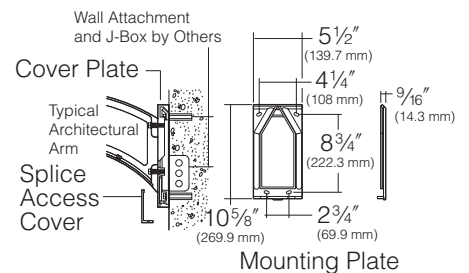


CAUTION: Structural integrity of mounting plate attachment to wall is by others.

Photocell Control


Cat. No. **(See right)**
 No Option

Factory installed photocell inside housing with a fully gasketed sensor on the side wall. For multiple fixture mountings, one fixture is supplied with a photocell to operate the others.



Cat. No. Line Volts
 A-30 120V
 A-31 208V
 A-32 240V
 A-33 277V
 A-35 347V
 A-34 480V

Mounting (see page 2)
 * Fixture with photocell receptacle
 s slave unit(s)

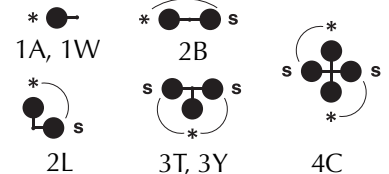


Allowable wattage per fixture:

70-175W

Convex Glass Lens

Cat. No. **CGL**
 No Option

The 3/16" thick clear convex tempered glass lens replaces the standard flat glass lens. Provides increased lens presence and provides a subtle improvement in uniformity where pole spacing is extreme. Increases effectiveness of houseside shielding.

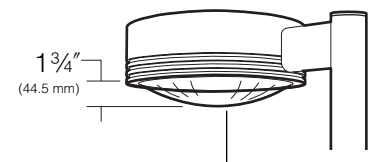


Polycarbonate Lens

Cat. No. **L17**
 No Option


Clear UV stabilized convex polycarbonate replaces standard flat glass lens, gasketed and integral with lens frame.

CAUTION: Use only when vandalism is anticipated to be high. Useful life is limited by UV discoloration from sunlight and metal halide lamps.

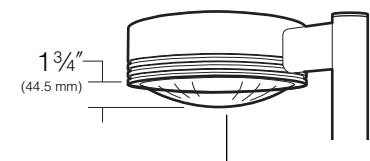

Type:

Job:




Optional Features

Houseside Shield

Cat. No. **(See right)**
 No Option

Fixtures with the standard flat glass lens are available with stamped aluminum louvers that pass streetside light and block houseside light, and a black panel added to the reflector to reduce houseside reflections. Fixtures with the optional convex glass lens are available with a formed aluminum shield that passes streetside light and blocks houseside light, and a black panel added to the reflector to reduce houseside reflections.

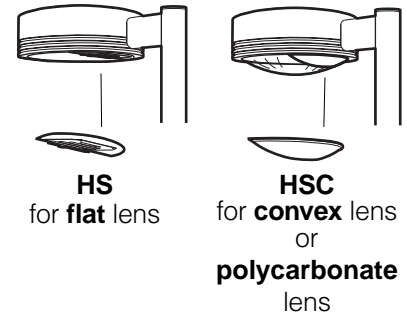

Note: Recommended for use with clear lamps only.

Cat. No.

HS For use with Types II, III, or IV distributions only.

HSC For fixtures with optional convex glass lens or polycarbonate lens. Not for use with Type V light distributions.

Neighbor Friendly Shield

Cat. No. **NFS**
 No Option


(Type IV only) Stamped internal shield and blocking panels are used to direct and redirect lighting into a forward throw distribution. The amount of light directed and redirected toward the back of the luminaire is dramatically reduced to create extremely low glare behind the pole. Only available on the Type IV reflectors.



Vertical Slipfitter Mounts

Cat. No. includes Mounting.
 Cat. No. **(See right)**
 No Option

Allows fixture with standard support arm to be mounted to steel poles having a 2" pipe-size steel tenon (2³/₈" O.D. x 4¹/₂" min. length). 4" round or square cast aluminum with flush cap, secured by four ³/₈" stainless steel set point allen screws. Pole tenon must be field drilled at one set screw location to insure against fixture rotation. Finished to match fixture.

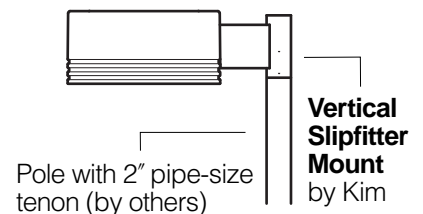

NOTE: 3Y only available on round slipfitter.

Cat. No.

VSF-1A

VSF-2B

VSF-2L

VSF-3T

VSF-3Y

VSF-4C



Round

Stainless steel set screws



Square

Cat. No.

SVSF-1A

SVSF-2B

SVSF-2L

SVSF-3T

SVSF-4C

Mounting Configuration

1A - single arm mount

2B - 2 at 180°

2L - 2 at 90°


3T - 3 at 90°

3Y - 3 at 120°

4C - 4 at 90°

Type:

Job:



Optional Features

Support Arm

Cat. No. **(See right)**
 No Option

Note: Refer to Kim Lighting's Architectural Arms Catalog for complete details.

Arm View:



Swept Solid Arm




Swept Hollow Arm



Upsweep Solid Arm



Upsweep Hollow Arm



Uplift Adjustable Aluminum Arm



Uplift Adjustable Stainless Steel Arm


Cat. No.: **AA01** **AA03** **AA05** **AA07** **AA09** **AA11**

Horizontal Slipfitter Mount

Cat. No. **HSF**
 No Option

Replaces standard mounting arm with a slipfitter which allows **CC/CCS** Arm Mount model to be mounted to a horizontal pole davit-arm with 2" pipe-size mounting end (2 3/8" O.D.). Cast aluminum clamp-type slipfitter with set screw anti-rotation lock. Bolts to housing from inside the electrical compartment using mounting holes for the standard support arm. Davit-arm must be field drilled at a set screw location to insure against fixture rotation. Finished to match fixture and arm.


Horizontal Slipfitter Mount

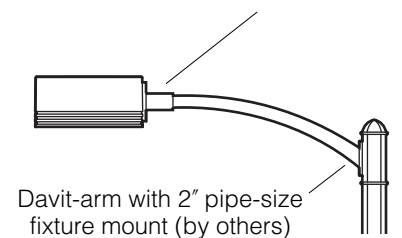

Accent Reveals

Cat. No. **(See right)**
 No Option

(For CC series only) Three aluminum bands riveted inside the housing reveals. Available in five standard Kim powder coat finishes. Custom colors available.

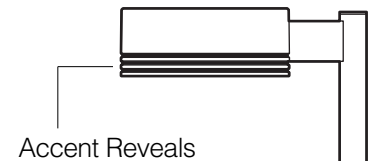

Color: Black Dark Bronze Light Gray Stealth Gray™ Platinum Silver White Custom Colors¹
 Cat. No.: **BL-REV** **DB-REV** **LG-REV** **SG-REV** **PS-REV** **WH-REV** **CC-REV**

¹Custom colors subject to additional charges, minimum quantities and extended lead times. Consult representative. Custom color description: _____