

**Type:**  
**Job:**  
**Fixture Catalog number:**

\_\_\_\_\_  
 Fixture      Mode      Finish

**Approvals:**

**Date:**  
**Page: 1 of 1**

## Specifications

**Housing:** Die-cast low copper alloy (<0.6% Cu) aluminum with clear anodized finish. Two 1/2" NPT in sides. Housing mounts into concrete, brick, or masonry (non-combustible materials). Internal splice area provided behind lamp plate.


**Lens Frame:** Die-cast aluminum, with silicone gasket, attaches to housing with two captive 10-32 stainless steel, hex socket cap screws.

**Lens:** Tempered prismatic glass with silicone gasket, concealed above lens frame opening.

**Finish:** On Lens Frame only, Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

**Optical System:** A total of 3 or 9 LED emitters are configured together as a module. Available in 3500K and 5100K.

**Driver:** Universal Voltage from 120 to 277V with a ±10% tolerance. -40° F. starting temperature. All drivers are Underwriters Laboratories recognized.

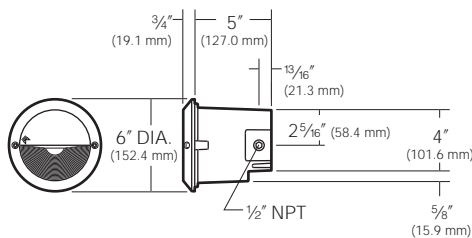

## ORDERING INFORMATION

Fixture	Source
<input type="checkbox"/> EL817 / 3L3KUV <sup>1</sup>	3.6W, 3 LED's, 3500K
<input type="checkbox"/> EL817 / 3L5KUV <sup>1</sup>	3.6W 3 LED's, 5100K

Fixture	Source
<input type="checkbox"/> EL817 / 9L3KUV <sup>1</sup>	10.8W, 9 LED's, 3500K
<input type="checkbox"/> EL817 / 9L5KUV <sup>1</sup>	10.8W, 9 LED's, 5100K

<sup>1</sup> Universal Voltage from 120 to 277V with a ±10% tolerance.  
 For 3.6W, Max Amps. are .030 for 120V, .020 for 208V, .015 for 240V, .013 for 277V. For 10.8W, Max Amps. are .090 for 120V, .050 for 208V, .045 for 240V, .040 for 277V..

## Finish

- BL** - Black
- DB** - Dark Bronze
- GR** - Verde Green



## Listings and Ratings

UL cUL 1598 <sup>1</sup>	IP66 Rated	25C Ambient
--------------------------	------------	-------------

<sup>1</sup>Suitable for wet locations

KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.