

Type:

Job:

Fixture Catalog number:

Fixture and Finish

Fixture Options:

Ordered Separately from Fixture
See page 2

Approvals:

Date:
Page: 1 of 2

Specifications

Housing and Lens Frame: Die-cast low copper alloy aluminum. Frame with silicone gasket, attaches to housing with four captive ¼-20 stainless steel, slotted cap screws.

Arm: Cast aluminum. Head is independently rotatable 360° vertically from top dead center. Head may be positioned straight up. Set screw provided for locking position.

Wall Plate: Die-cast low copper alloy aluminum. Attaches to stainless steel plate for mounting to any standard electrical outlet box. Internal set screw provided for locking position.

Lens: Tempered clear soda lime glass with silicone gasket. Flush with lens frame to promote water runoff when positioned upward.

Socket: KLV50 G4 to GY6.35 socket for bipin lamp.


Wiring: No. 18-2 12 Volt cord.

Optical System: KLV52 A total of 3 LED emitters configured in a rectangular array comprised together as a module. Available in 3500K and 5100K.

Driver: KLV52 Constant current electronic driver. Available in 12V input. -40°F. starting temperature. All drivers are Underwriters Laboratories recognized.

Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a titanated zirconium conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green (**GR**).

Certification: UL Listed to U.S. and Canadian safety standards for wet locations.

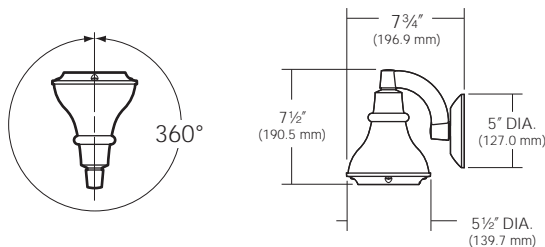

ORDERING INFORMATION

Fixture ¹	Lamp	Finish
<input type="checkbox"/> KLV50BL	50W MR16 Bipin Halogen	Black
<input type="checkbox"/> KLV50DB	50W MR16 Bipin Halogen	Dark Bronze
<input type="checkbox"/> KLV50GR	50W MR16 Bipin Halogen	Verde Green

Fixture	Source	Finish
<input type="checkbox"/> KLV52/3L3K/BL	3.6W, 3 LED's, 3500K ²	Black
<input type="checkbox"/> KLV52/3L5K/BL	3.6W, 3 LED's, 5100K ²	
<input type="checkbox"/> KLV52/3L3K/DB	3.6W, 3 LED's, 3500K ²	Dark Bronze
<input type="checkbox"/> KLV52/3L5K/DB	3.6W, 3 LED's, 5100K ²	
<input type="checkbox"/> KLV52/3L3K/GR	3.6W, 3 LED's, 3500K ²	Verde Green
<input type="checkbox"/> KLV52/3L5K/GR	3.6W, 3 LED's, 5100K ²	

¹Remote transformer required.

².3 Max Amps.



KIM LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Type:

Job:

Page: 2 of 2



Fixture Options

Ordered Separately from Fixture

Lens Accessories
 Cat. No. (See right)
 No Option

HL72 - Hex Cell Louver: Constructed of hex cell aluminum louvers providing 45° cutoff, mounted in a circular frame, finished in baked high-heat flat black. Can be used in combination with colored lenses. Inserts behind lens into lens gasket. Cannot be used in combination with **SL** spread or **PL** prismatic lenses.



Cat. No.
 HL72 Hex Cell Louver

PL72 - Prismatic Lens: Softens lamp distribution and flattens beam spread. Best with flood lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.
 PL72 Prismatic Lens

SL72 - Spread Lens: Creates an oval beam pattern, more narrow in one beam axis. Best with spot lamps. Inserts behind lens into lens gasket. Cannot be used in combination with **HL72** louver.



Cat. No.
 SL72 Spread Lens